


Anti-Crash Rapid N barrier Layout		
Type	----	Qty.
Motor Location	Boom Length	---
---	----	--
Power/Electrical Requirement		
Phase	1 Φ	
Voltage	230 V	
Frequency	50 HZ	
Current	Max. 5 Amp.	

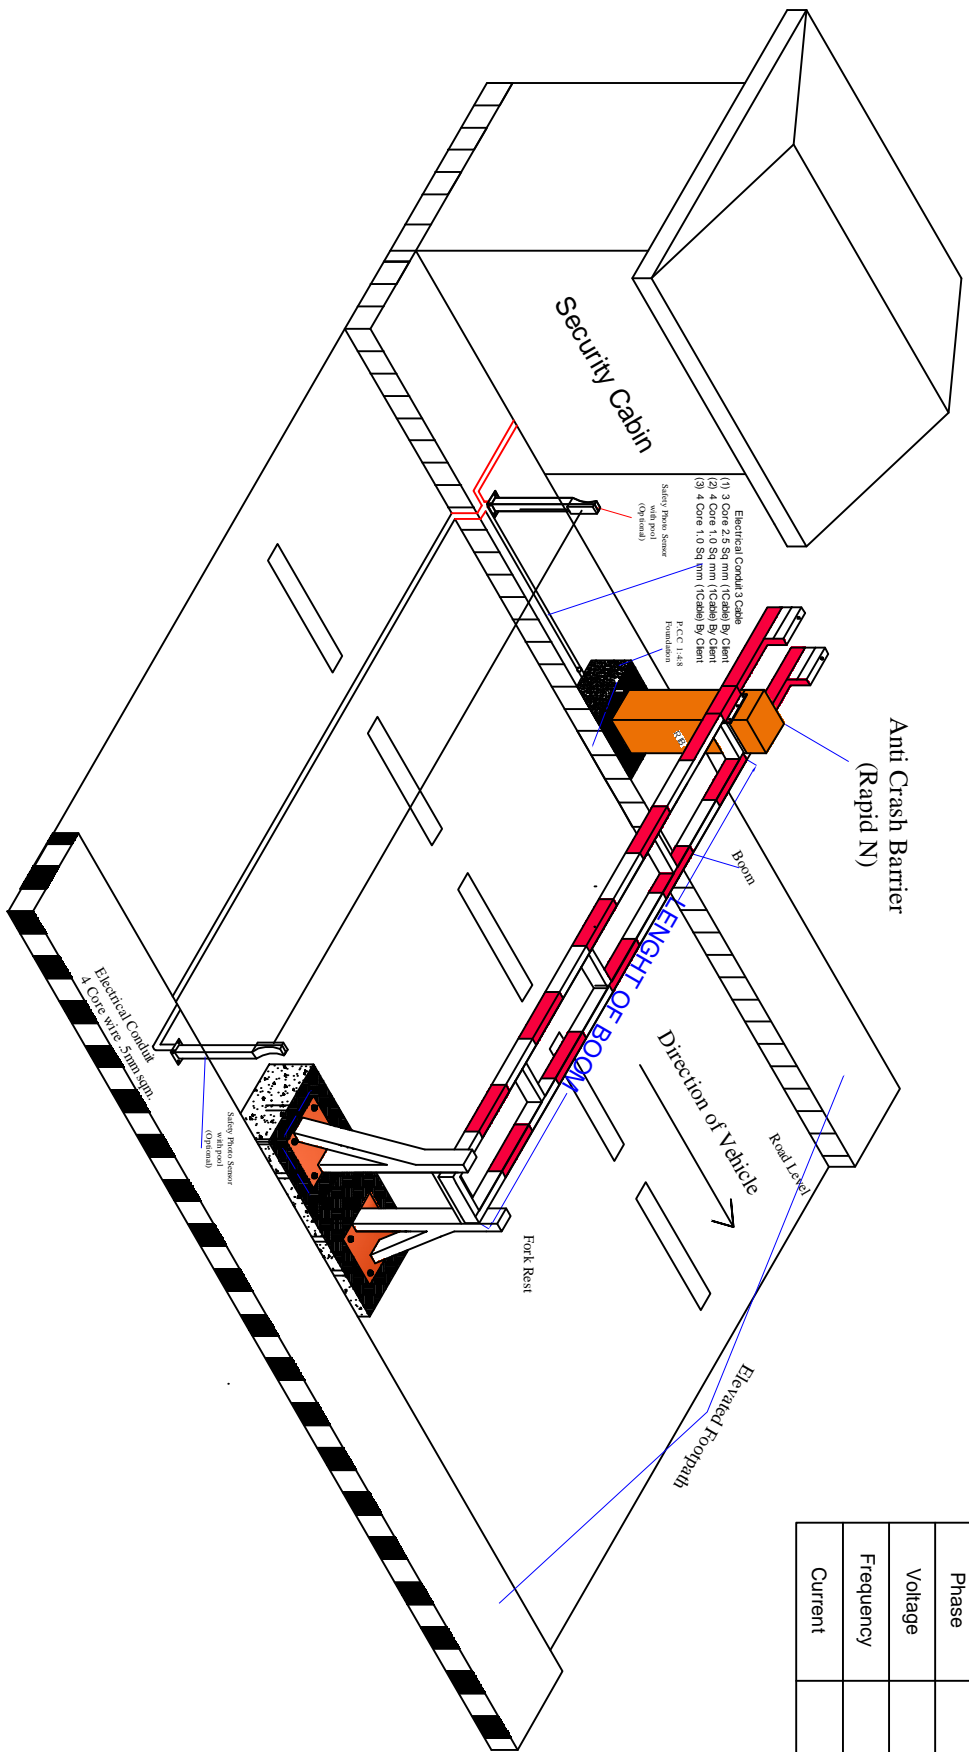

SCALE-N-TS

This drawing is the soul property of (TAS) Do not copy/reproduce /share with others without our permission.

REV	DATE	DESCRIPTION	DRAWN BY	APPROVED BY	DATE	DRAWN BY	CHECKED BY	APPROVED BY
00	08-10-18	ISSUED FOR APPROVAL	SOHRAB KHAN	MOHD.AMIL	08-10-18	SOHRAB KHAN	MOHD.AMIL	KAPIL SACHDEV
GROUP :- Automatic Boom Barriers			PRODUCT :- Anti Crash Boom Barrier			MODEL NO:- Rib-TAB-10-4 Meter		
PRO NO :- 3882			DRAWING NO :- GA-387 (PRO 3882) Rib-TAB-10-4 Meter					

