
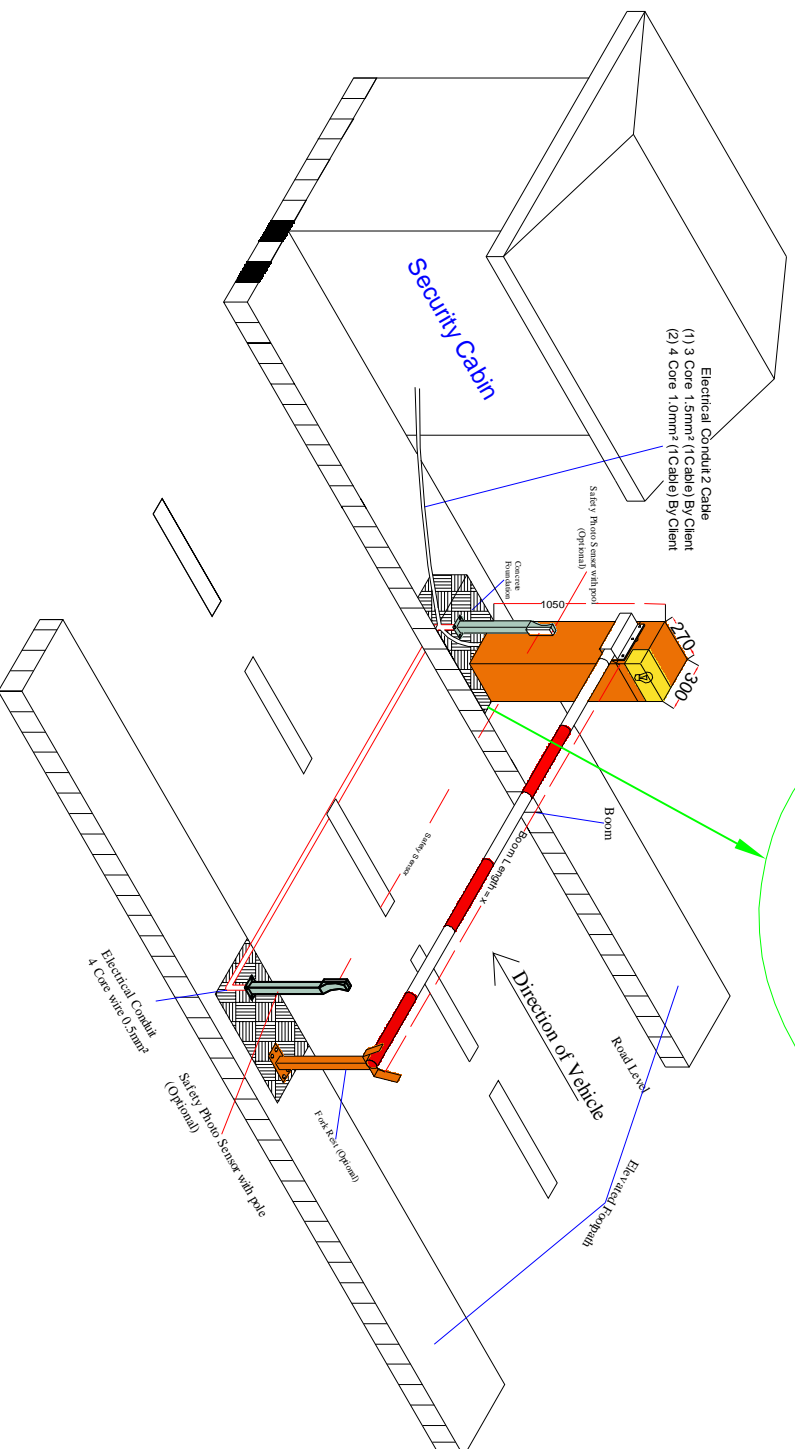


Rapid N barrier Layout		
Type	Qty.	
Motor Location	Boom Length	Qty.
---	---	---

Power/Electrical Requirement	
Phase	1 Φ
Voltage	230 V
Frequency	50 HZ
Current	Max. 5 Amp.

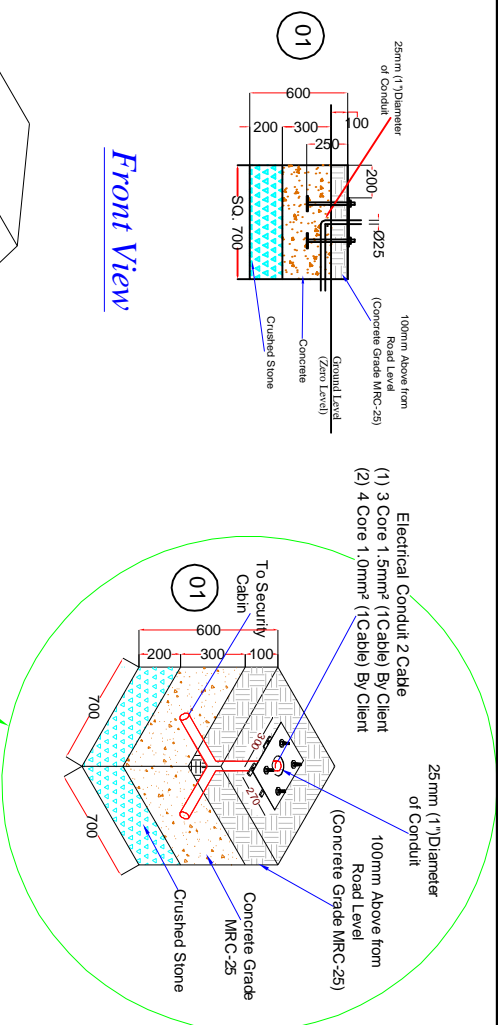

SCALE-N-TS

GROUP :- Automatic Boom Barriers

PRODUCT :-

Auto Barrier

MODEL NO :- Rib Normal Barrier

This drawing is the soul property of (TAS) Do not copy/reproduce /share with others without our permission.

REV	DATE	DESCRIPTION	DRAWN BY	APPROVED BY	DATE	DRAWN BY	CHECKED BY	APPROVED BY
00	21-09-18	ISSUED FOR APPROVAL	SOHRAB KHAN	MOHD.AMIL	21-09-18	SOHRAB KHAN	MOHD.AMIL	KAPIL SACHDEV

PRO NO :- 915

DRAWING NO :- GA-248(PRO915) Rib Normal Barrier

